

Installation of KRAFT triangle open cell ceiling


Step 1

The triangle open cell ceiling is formed by adding diagonal rails to the standard classic grilyato cassettes. Thanks to this, there are two options for mounting the KRAFT triangle open cell ceiling.

Option 1: install the diagonal rails when assembling the open cell cassettes

For what type of pattern it is suitable: the pattern consists of identical repeating elements.


In this variant, at the stage of mounting the open cell cassettes before installing them on the ceiling, the diagonal rails are installed in the right places. Particular attention should be paid to the installation of the cassettes, so that the pattern on the ceiling coincides with the planned one.

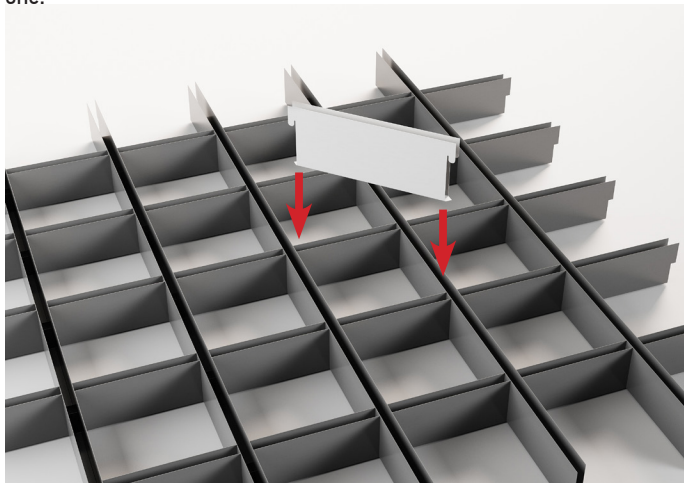

Option 2: installation of diagonal rails on the already mounted open cell ceiling

For what type of pattern it is suitable: a designed pattern with a complicated structure.

In this variant, the main open cell ceiling array is mounted in a standard way. And the installation of diagonal rails is carried out on the already mounted ceiling. You can control the conformity of the pattern yourself.

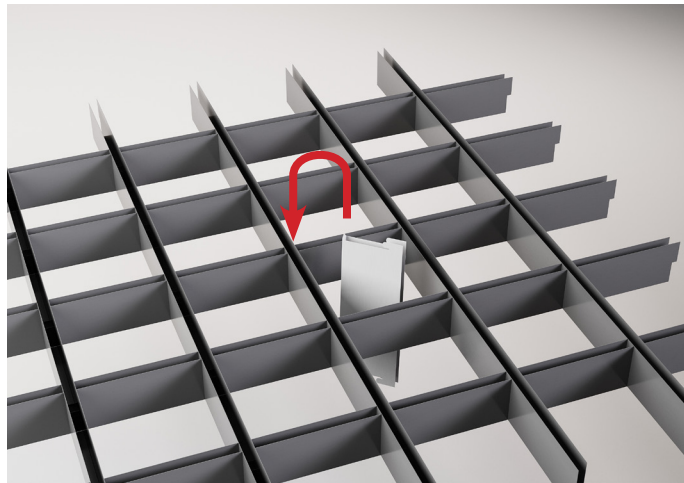

Step 2

Snap the locks of the diagonal rail onto the main open cell rails. On the visible side of the ceiling, the bottom surface of the diagonal rail must be flush with the main rails.

